



Pull it as tight as possible and knot off.

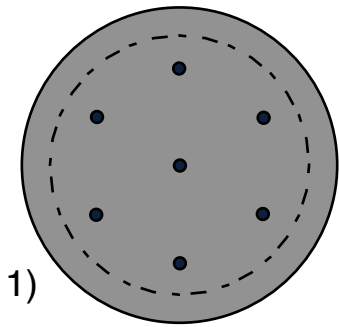


Cut one per button and mark the dots.

1)

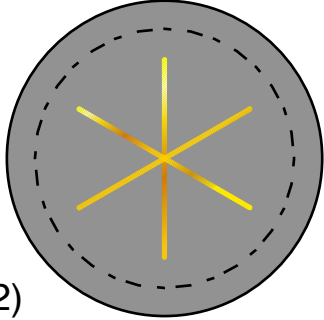

Thread three strands of DMC metallic thread 24" long and knot the end. From the back sew to the front thru one of the edge dots. Sew from the front to the back across to the thru the opposite dot and knot off in the back. Cut the thread. Repeat with the other two sets of dots


2)

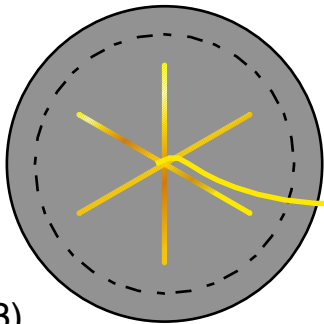

Knot the end of the remaining thread and from the back sew to the front very close to the center dot. Then sew down again as as to anchor the three cross threads form step 2.


Sew the thread back to the right side near one of the ribs.

3)

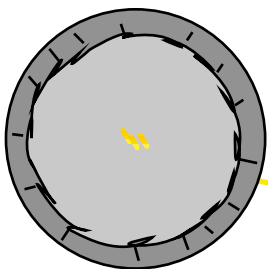


Finger press

4)

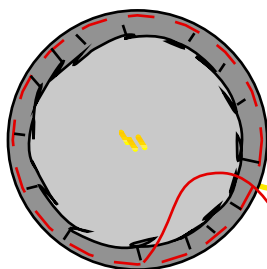

Sew a gathering stitch with strong thread as close to the pressed edge as possible.

5)

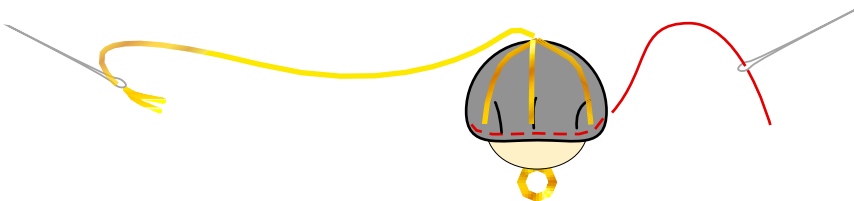


Slip it over the wood base and pull the gathering stitch and tuck the seam allowance inside.

6)

7)




8)

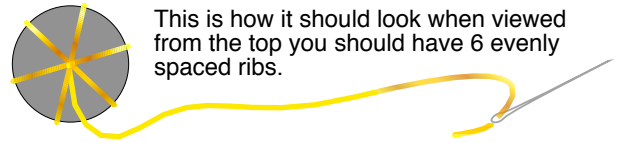

This is how it should look when viewed from the top you should have 6 evenly spaced ribs.


9)

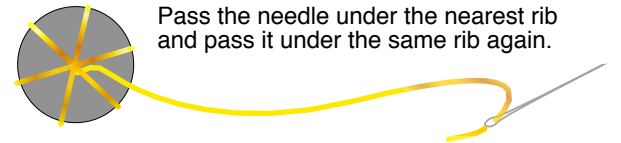

Pass the needle under the nearest rib and pass it under the same rib again.

Rotate button


10)

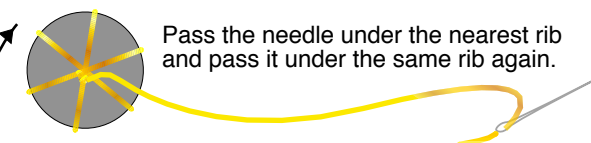

Pass the needle under the nearest rib and pass it under the same rib again.


Rotate button

11)

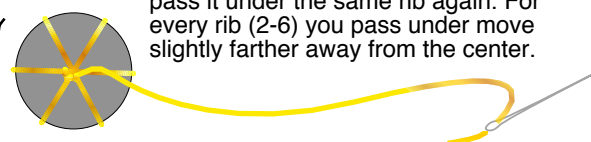


Pass the needle under the next rib and pass it under the same rib again. For every rib (2-6) you pass under move slightly farther away from the center.

12-13)

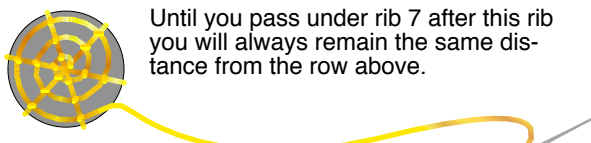

Until you pass under rib 7 after this rib you will always remain the same distance from the row above.

Continue until you are at the end of your ribs. Knot off and bury you thread and cut off.

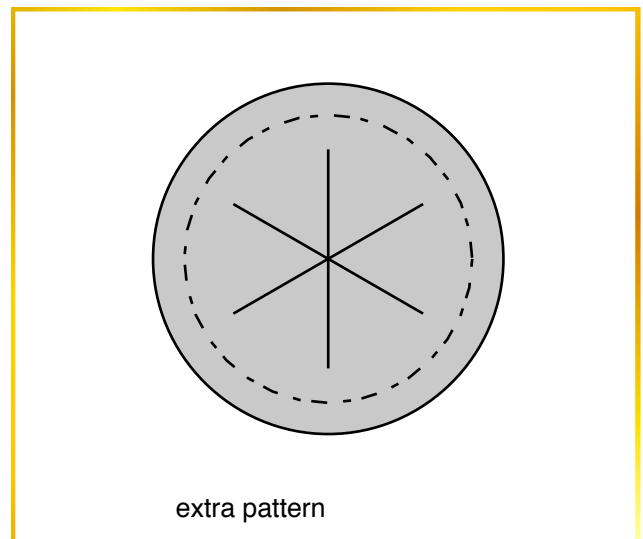

extra pattern